

VM-3360E

VM EXTENSION AMPLIFIER 360W



Order no: VM-3360E CE


Specifications

| | |
|------------------------|---|
| Power source | 230 V AC, 50 / 60 Hz |
| Rated output | 360 W (total into 6 zones) |
| Frequency response | 50 Hz - 20 kHz (at 1/3 rated output) |
| Distortion | < 0.7 % |
| Distortion | < 0.7 % |
| Power consumption | 850 W (with rated output signal), 380 W (according to EN 60065) |
| S/N ratio | 85 dB (or more) |
| Inputs | External amplifier Input: 100 V Line removable terminal block (14 pins) Local input -50 dBV (Mic) / -10 dBV (Line), 600 Ω / electronically balanced, removable terminal block (14 x 2 pins) |
| Outputs | Speaker output 1 - 6: Total within rated output, removable terminal block (14 pins) Direct output from internal or external amplifier, removable terminal block (16 pins) |
| Control input | Input 1 - 8: No-Voltage make contact input, open voltage: 24 V DC, short-circuit current: under 2 mA, removable terminal block (14 pins) |
| Control output | Output 1 - 8: Isolated open collector output, withstand voltage: 30 V DC, operating current: under 10 mA, removable terminal block (14 pins) |
| Indicator | Power; 5-segment bargraph level meter, selected zone, emergency zone active, communication fault, CPU fault |
| Dimensions (W x H x D) | 482 x 132,6 x 407 mm |
| Dimensions (ø x D) | x 407 mm |
| Finish | Aluminium, Steel plate, hairline, surface-treated, paint, black |
| Operating humidity | 5 to 95% RH (no condensation) |
| Operating temperature | -5°C to +45°C |

VM-3360E

VM EXTENSION AMPLIFIER 360W

Appearance

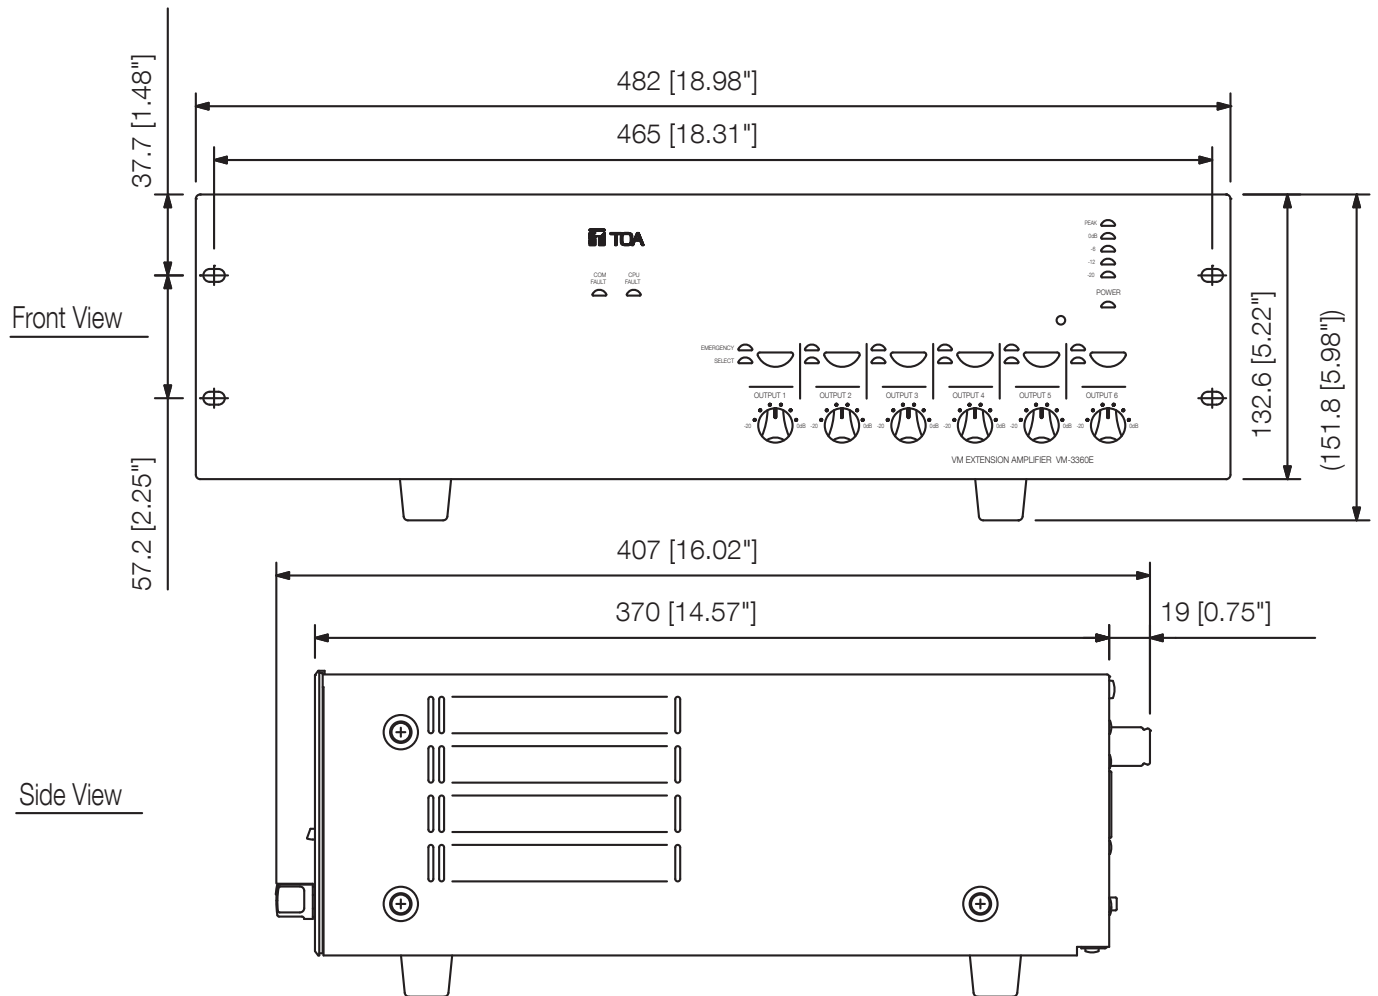

UNIT:mm

SCALE:1/4