

## DSP8062 DSP8063 DSP8064

### Wall Mount Speaker with Power Tap



#### Description

This wall-mounted speaker features a sleek minimalist design in black or white, offering professional-grade sound quality with durable, high-quality materials for a clear and robust audio experience.

#### Features

- Fashion minimalist design aesthetic atmosphere, white black for choice.
- The integration of professional wall design, fine appearance, sophisticated high-grade filing.
- Focus on sound quality, inverse-phase type design, and equipped with high pitch and low pitch double unit, clear sound level, mellow, transparent, clear and bright, strong bass.
- Rear power adjustable knob, free choice of input mode.
- Mesh: made of 1060 pure aluminium, subject to hardening and anti-oxidation treatment,
- not easy to cause deformation, and never get rusty.
- Box body: made of UL94V-0 grade fireproof thickened ABS material, durable in use,
- safe and reliable.
- Driver unit: treble diaphragm is made of natural silk film; and bass diaphragm is made
- of polypropylene material, 3-3.5 inches magnetic circuit design.
- Mounting bracket: precision rust-proof treatment.


#### Specifications

| Model           |                      | DSP8062    | DSP8063    | DSP8064      |
|-----------------|----------------------|------------|------------|--------------|
| Acoustic System | Speaker Unit         | 4"×1, 1"×1 | 5"×1, 1"×1 | 6.5"×1, 1"×1 |
|                 | Sensitivity (1m, 1W) | 90±2dB     | 90±2dB     | 91±2dB       |
|                 | MAX. SPL. (1m)       | 103±2dB    | 105±2dB    | 107±2dB      |
|                 | Frequency Response   | 95Hz-20kHz | 80Hz-20kHz | 65Hz-20kHz   |
|                 | Rated Power          | 20W        | 30W        | 40W          |

| Other Specifications | Input              | Constant Voltage    | 70V/100V      | 70V/100V      | 70V/100V      |
|----------------------|--------------------|---------------------|---------------|---------------|---------------|
|                      |                    | Constant Resistance | 8Ω            | 8Ω            | 8Ω            |
|                      | Dimensions (H×W×D) |                     | 255×176×170mm | 280×194×185mm | 310×215×203mm |
|                      | Net Weight         |                     | 2.6kg         | 3.2kg         | 4.6kg         |



## Front / Rear Panel

### Product Information

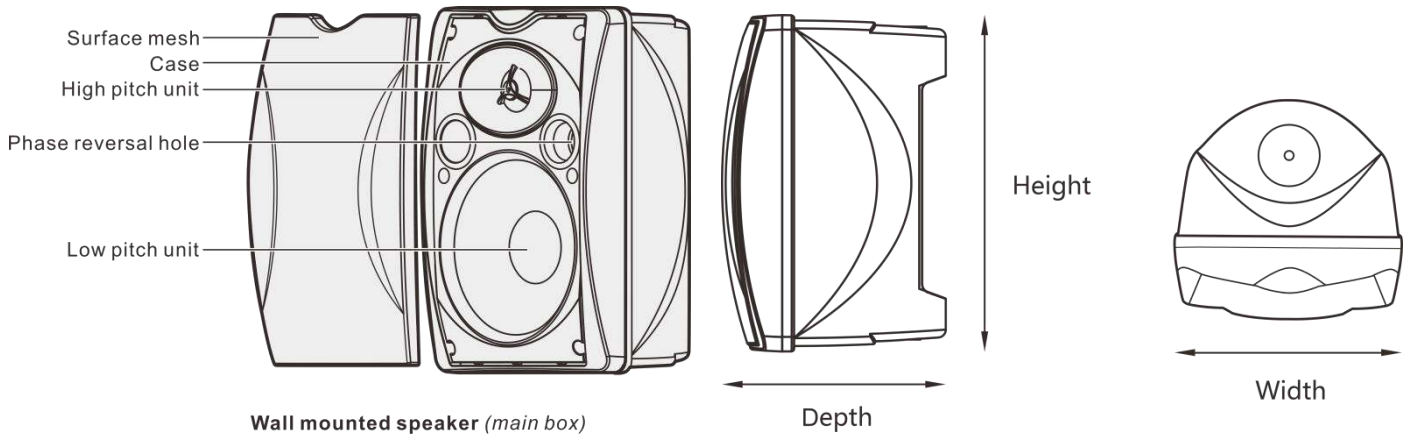


| Model   | Height | Width | Depth |
|---------|--------|-------|-------|
| DSP8062 | 255    | 176   | 170   |
| DSP8063 | 280    | 194   | 185   |
| DSP8064 | 310    | 215   | 203   |

Unit: mm

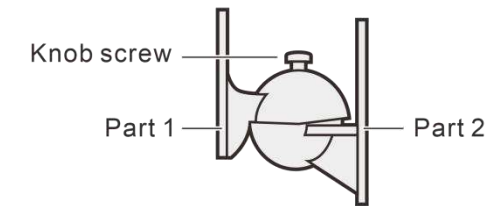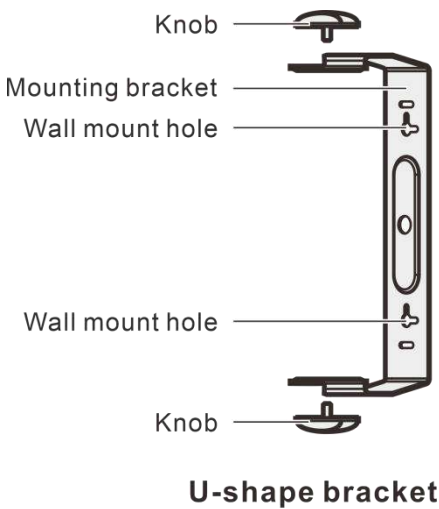


Multi-angle adjustable bracket  
(only support purchasing for DSP8063)

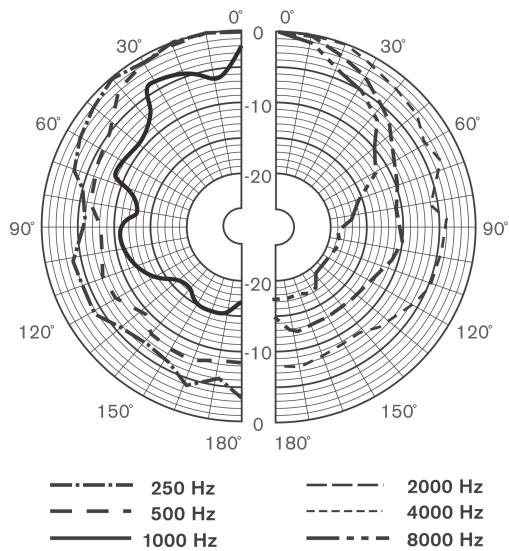


**DSP8062**

**Vertical Directivity Pattern**

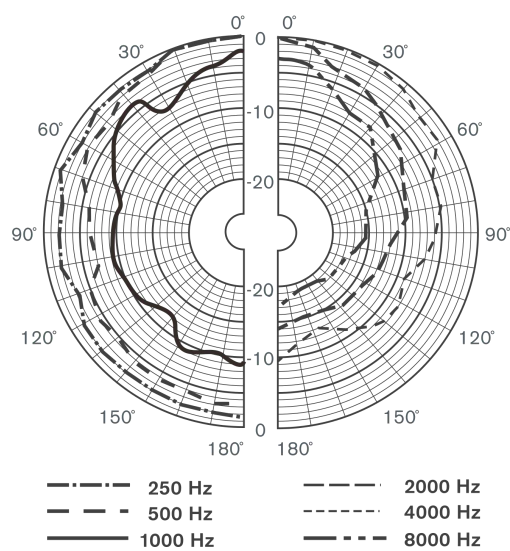


**DSP8062**

**Horizontal Directivity Pattern**

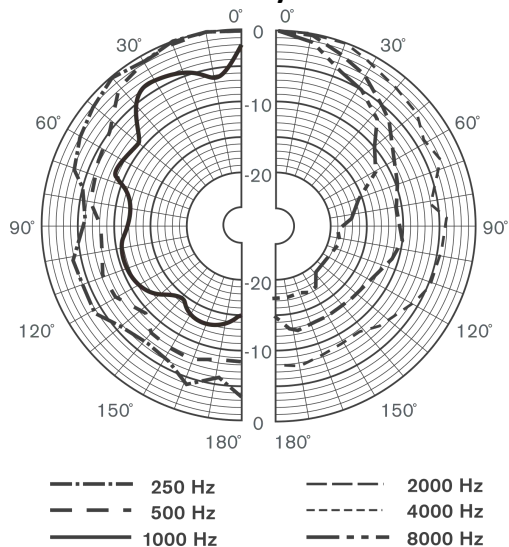


**DSP8063**

**Vertical Directivity Pattern**

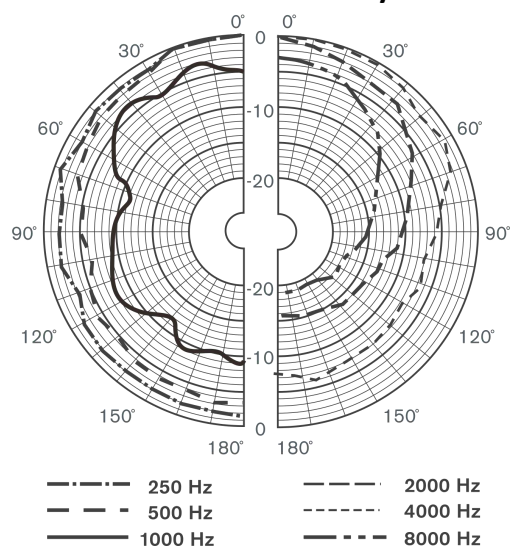


**DSP8063**

**Horizontal Directivity Pattern**

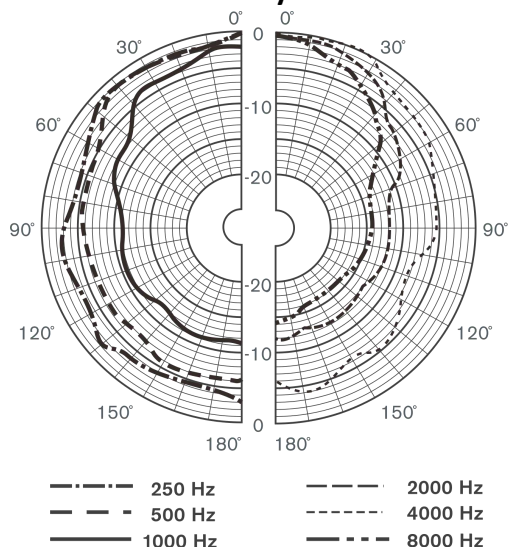

**DSP8064**

**Vertical Directivity Pattern**

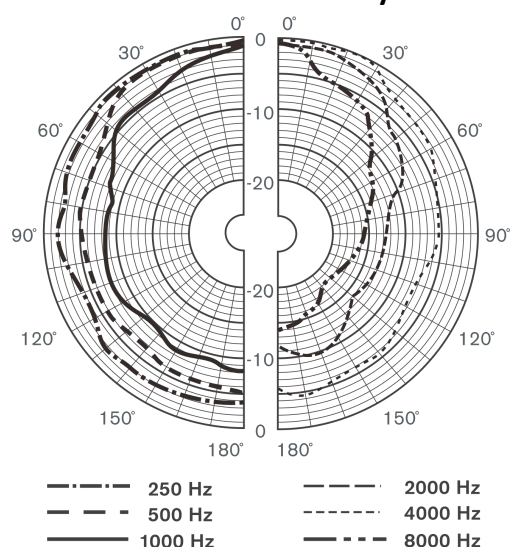


**DSP8064**

**Horizontal Directivity Pattern**


### DSP8062 Frequency Response

(dB SPL, 1W, 1m)

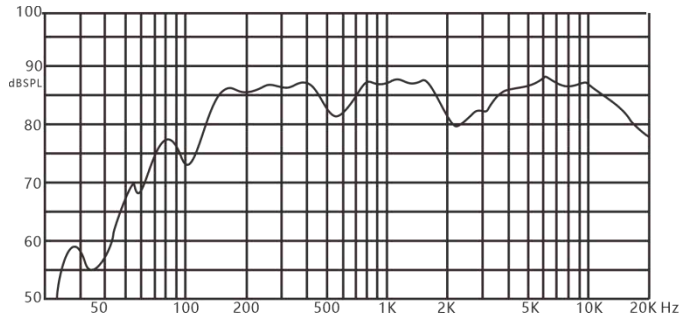


### DSP8062 Distortion

(THD< 5% 1W, 1m, 100Hz-10kHz)

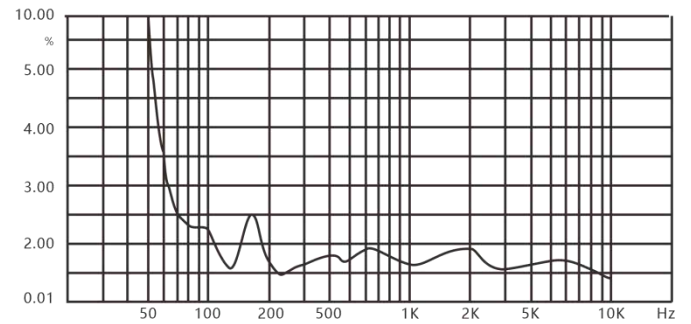


### DSP8063 Frequency Response

(dB SPL, 1W, 1m)

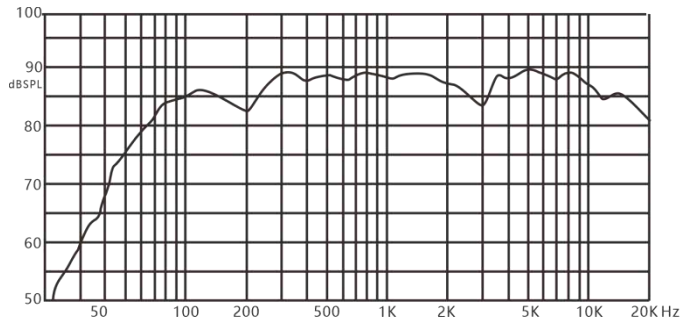


### DSP8063 Distortion

(THD< 5% 1W, 1m, 100Hz-10kHz)

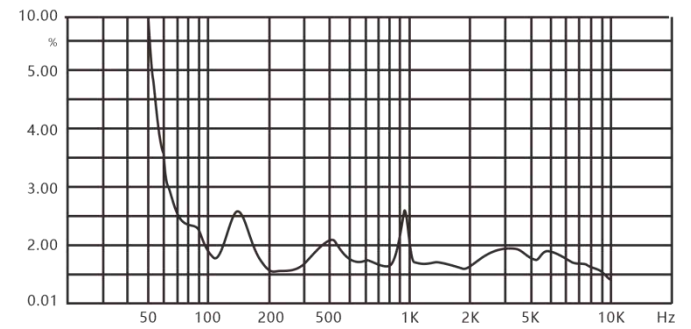

### DSP8064 Frequency Response

(dB SPL, 1W, 1m)

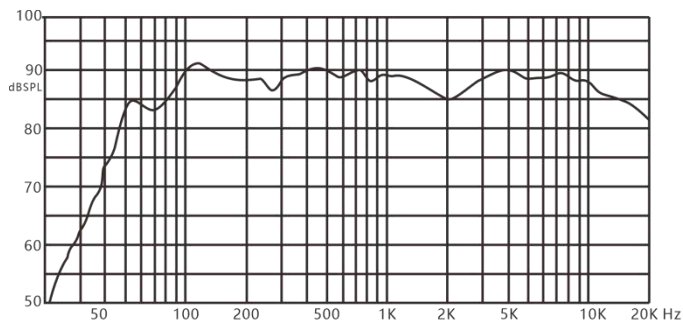

### DSP8064 Distortion

(THD< 5% 1W, 1m, 100Hz-10kHz)

