






Σ5206/50

Toasting paint speaker

User's manual



ED-B3-MA-050325-003



Features:

■ **Two transducers two way phase-reversed full range professional speaker, professional and efficient transducers, computer simulating design.**





- Two transducers two way full range
- High SPL, high sensitivity speaker
- One 6" woofer with big power
- One 1" compression driver with PEI diaphragm
- Drived by single amplifier
- 140° × 140° wide dispersion can get the better covering
- Computer analog design bring better frequency response and phase
- Flexible and convenient installation mode
- Used for full range sound reinforcement, language reinforcement for meeting system, background music, bar, dance hall and other public avenues
- Suitable to be as monitor and sound compensation for any big audio project and touring performance
- Can work with β 3 high energy subwoofer(ΣB118D) when used for high quality replaying music







Specifications:

Fequency Response(-3dB):	80Hz-18KHz
Sensitivity(1m/1W):	90dB
Crossover Frequency:	3.2KHz
Dispersion(H×V):	140° × 140°
Rated Power(RMS):	80W
Rated Impedance:	8 Ohm
DC Impedance:	5.6 Ohm
THD:	<3%
Input Connectors:	NL4×1
Net Weight(1Pcs):	6kg
Gross Weight:	15kg
Dimensions (W×D×H):	212×194×364mm
Packaging Dimensions 2pcs/pack(W×D×H):	541×293×465mm

Cabinet Dimension:

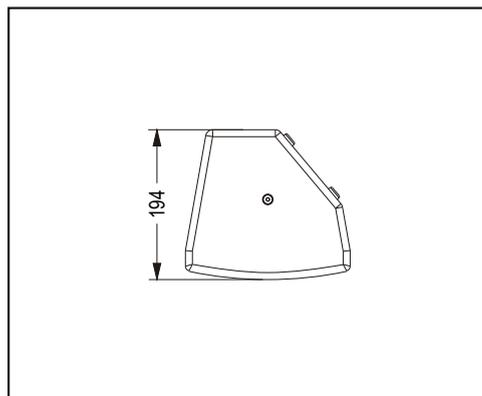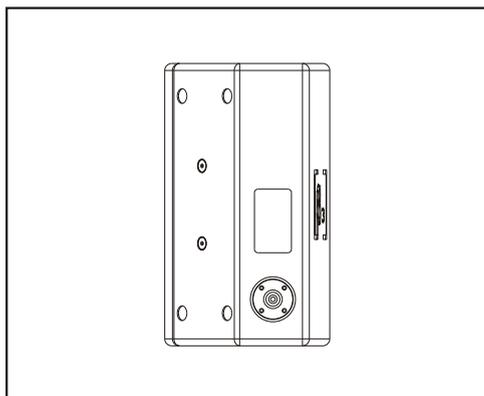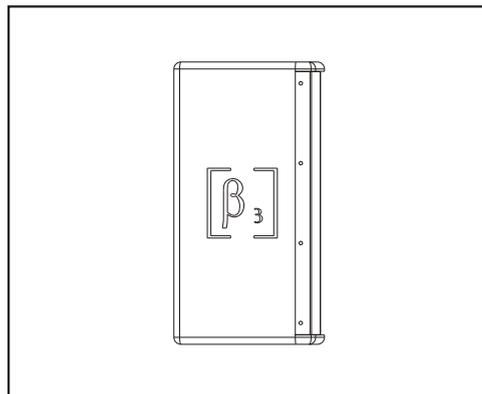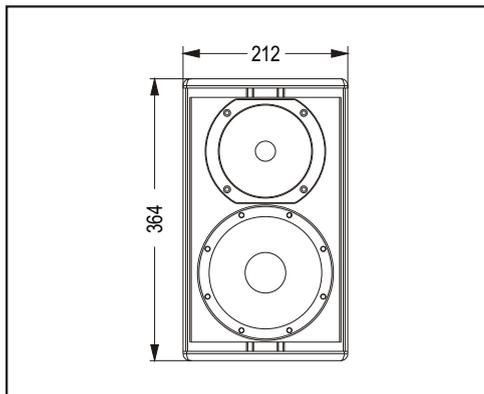

Installation drawing:

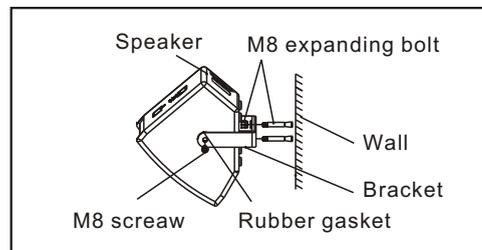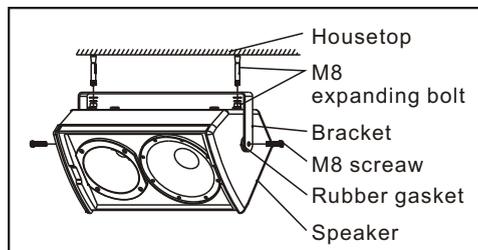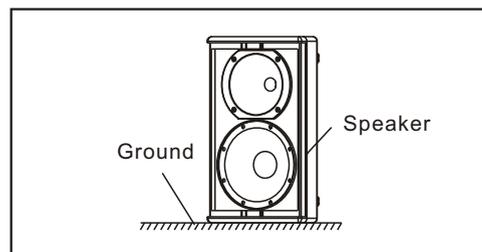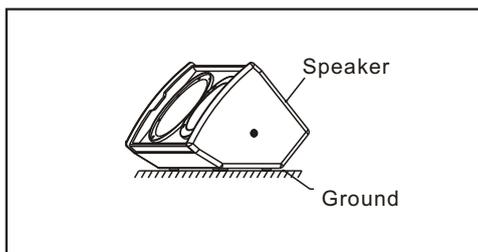

ΣS206/50
FULL RANGE PROFESSIONAL SPEAKER