

# PC-2360EN

The ceiling speakers of the PC-series are suitable for announcements and BGM system use in high quality. The speaker's design harmonizes with modern architecture and decor. The PC-2360EN is designed according to EN54-24.




Order no: PC-2360EN  
 Alternative products: VM-3360VA,  
 VM-3240VA, VP-2421, VP-2421incl, VP-2241,  
 VP-2241incl, VP-2122incl, VP-2122, VP-2064,  
 VP-2064incl, VP-3504, VP-3154, VP-3304,  
 SX-2000SM, VX-2000, VX-3008F, VX-3004F,  
 VX-3016F

## Specifications

Frequency response	60 Hz - 20 kHz
Connection	Push wire connection (Bridging terminal - 2 branch type)
Sensitivity (1#V, 1#m) (combined)	94 dB SPL
Speaker component	16 cm cone-type
Tappings	6/3/1,5/0,8 W (100V)3/1,5/0,8/0,4 W (70V)
Finish	traffic white (RAL 9016 or equivalent)

## Appearance



### TOA CEILING MOUNT SPEAKER 6INCH 6W PC-2360EN

The PC-1860EN is certified according to the European Standard EN 54-24:2008, DoP number is 19-010.


**DESCRIPTION**

The PC-2360EN is the voice alarm certification product. The PC-2360EN is suitable for announcement and BGM system use in high quality sound cone speaker. Speaker design that harmonize with the venue's architecture and decor. Thin panel does not clash with interior design.


**SPECIFICATIONS**

Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise) 92 dB (1 W, 1 m) (100 Hz - 10 kHz, pink noise) 80 dB (1 W, 4 m) (100 Hz - 10 kHz, pink noise)
Maximum Sound Pressure Level	99 dB (6 W, 1 m) (100 Hz - 10 kHz, pink noise) 87 dB (6 W, 4 m) (100 Hz - 10 kHz, pink noise)
Frequency Response	60 Hz - 20 kHz (peak -20 dB)
Coverage Angle (-6 dB)	Horizontal and Vertical: 160° (500 Hz), 170° (1 kHz), 160° (2 kHz), 60° (4 kHz) according to EN 54-24
Environmental type	A (indoor applications)
Speaker Component	16 cm (6") cone-type
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Dimensions for Fixing Hole	Mounting hole: $\varnothing 200 \pm 3$ mm (7.87" $\pm$ 0.12") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring clamp
Applicable Cable	Solid wire: 0.5 - 3 mm <sup>2</sup> (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal-2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	$\varnothing 230 \times 76$ (D) mm (9.06" $\times$ 2.99")
Weight	740 g (1.63 lb)
Accessory	Paper pattern --1, Zip tie --3


**APPEARANCE**

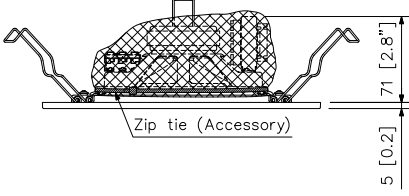


Zip tie (Accessory)

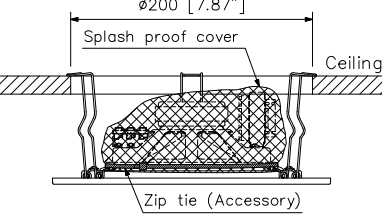

Mounting Diagram

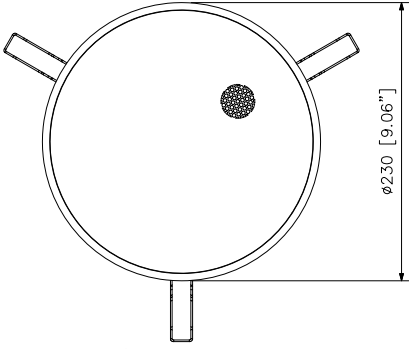

$\varnothing 230$  [9.06"]

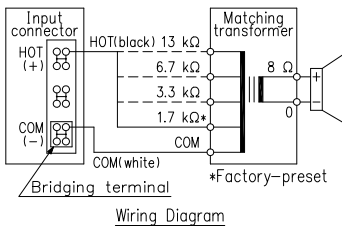

Wiring Diagram

Note: Use transformer terminals when changing input impedance.

UNIT:mm SCALE:1/4
19E
TOA Corporation
DWG No: GPC03BA1-1