

The SC-240 speaker ensures uniform dispersion of intelligible sounds thanks to an aluminum die casting, directional speaker. It is ideal for making public address announcements from a car or for other applications that require wide horizontal directivity, such as outdoor sound amplification.




Order no: SC-240


Specifications

Frequency response	250 Hz - 5 kHz
Sensitivity (1#V, 1#m) (combined)	107 dB
Rated input	240 W
Rated impedance	8 Ω
Weight	28,0 kg
Dimensions (W x H x D)	598 x 251 x 654 mm
Dimensions (ø x D)	x 654 mm
Gross weight	32,6 kg
Finish	Aluminium, die-cast, silk grey (RAL7044 or equivalent)
Operating temperature	-20 °C to +55 °C

Appearance

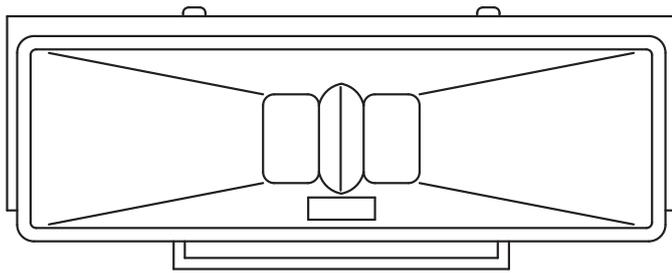

Front View

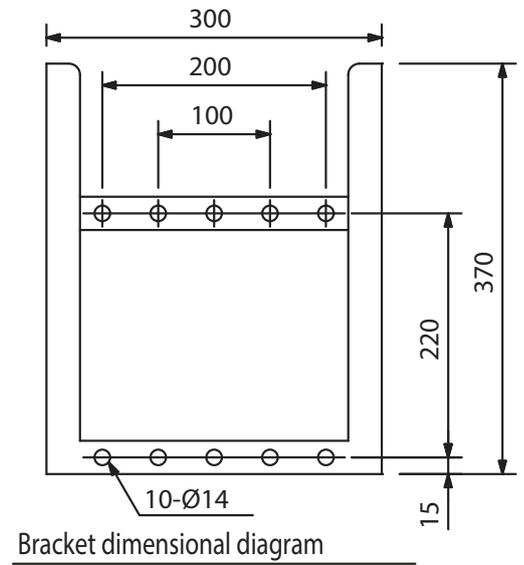

Bracket dimensional diagram