

SR-C8S

LINE ARRAY SPEAKER

The SR-C8S is a 2-way line array speaker featuring wave front control technology which creates a sound field with high sound clarity and uniform sound pressure. Recommended digital speaker processor is the DP-SP3. It can be converted into the bi-amplifier drive system by changing the internal connection.



Order no: SR-C8S



Specifications

Frequency response	65 Hz - 20 kHz
Connection	M5 screw terminal, distance between barriers: 12.2 mm and Neutrik NL4MP × 2
Sensitivity (1#V, 1#m) (combined)	98 dB (single-amp mode); low: 95 dB; high: 110 dB (bi-amp mode)
Speaker component	Low frequency: 20 cm cone-type / High frequency: Wave-front control horn + compression drivers × 2
Directivity angle horizontal	110 °
Directivity angle vertical	15 °
Rated impedance	16 Ω
Crossover frequency	1600 Hz
Power handling capacity	Continuous program: 360 W (single-amp mode) / low frequency: 360 W, high frequency: 180 W (bi-amp mode)
Weight	16,0 kg
Certificates	Ease
Dimensions (W x H x D)	526,6 x 293 x 294 mm
Dimensions (ø x D)	x 294 mm
Gross weight	20,3 kg
Finish	Plywood, paint, black (RAL 9005 or equivalent)

SR-C8S

LINE ARRAY SPEAKER

Appearance

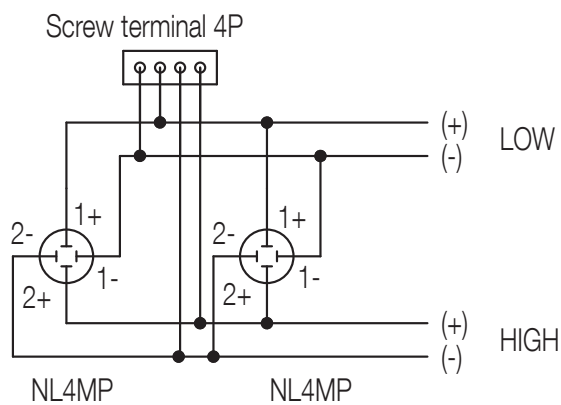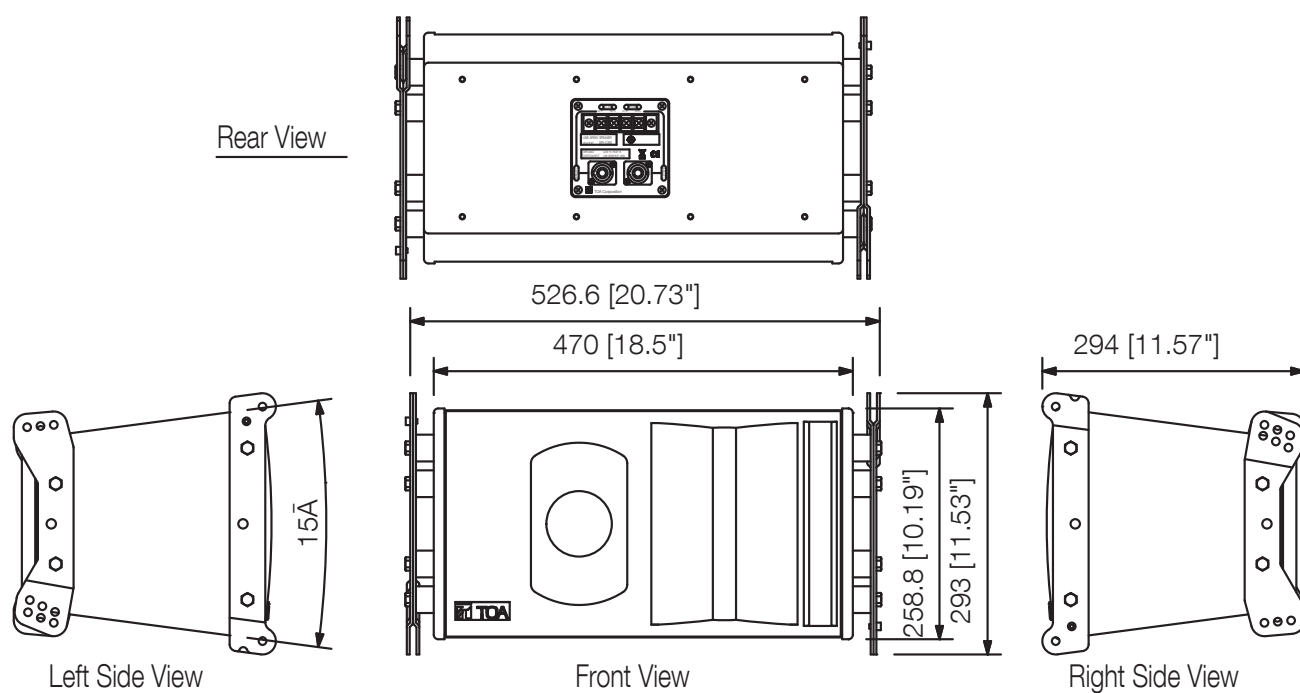

Wiring Diagram

UNIT:mm

SCALE:1/10