



DM-1500

DYNAMIC MICROPHONE

The DM-1500 is designed for both voice and speech applications.




Order no: DM-1500

Specifications

Frequency response	70 Hz - 15 kHz
Connection	3-pin XLR jack
Rated impedance	600 Ω
Controls	Talk switch: Short-off type, slide on/off switch
Type	Dynamic microphone
Directivity	Cardioid
Sensitivity	-56 dB (1 kHz 0 dB = 1 V/Pa)
Dimensions (W x H x D)	x 173
Dimensions (ϕ x D)	40,5 x 173 mm
Finish	Zinc, die-cast, paint, metallic gold

Appearance

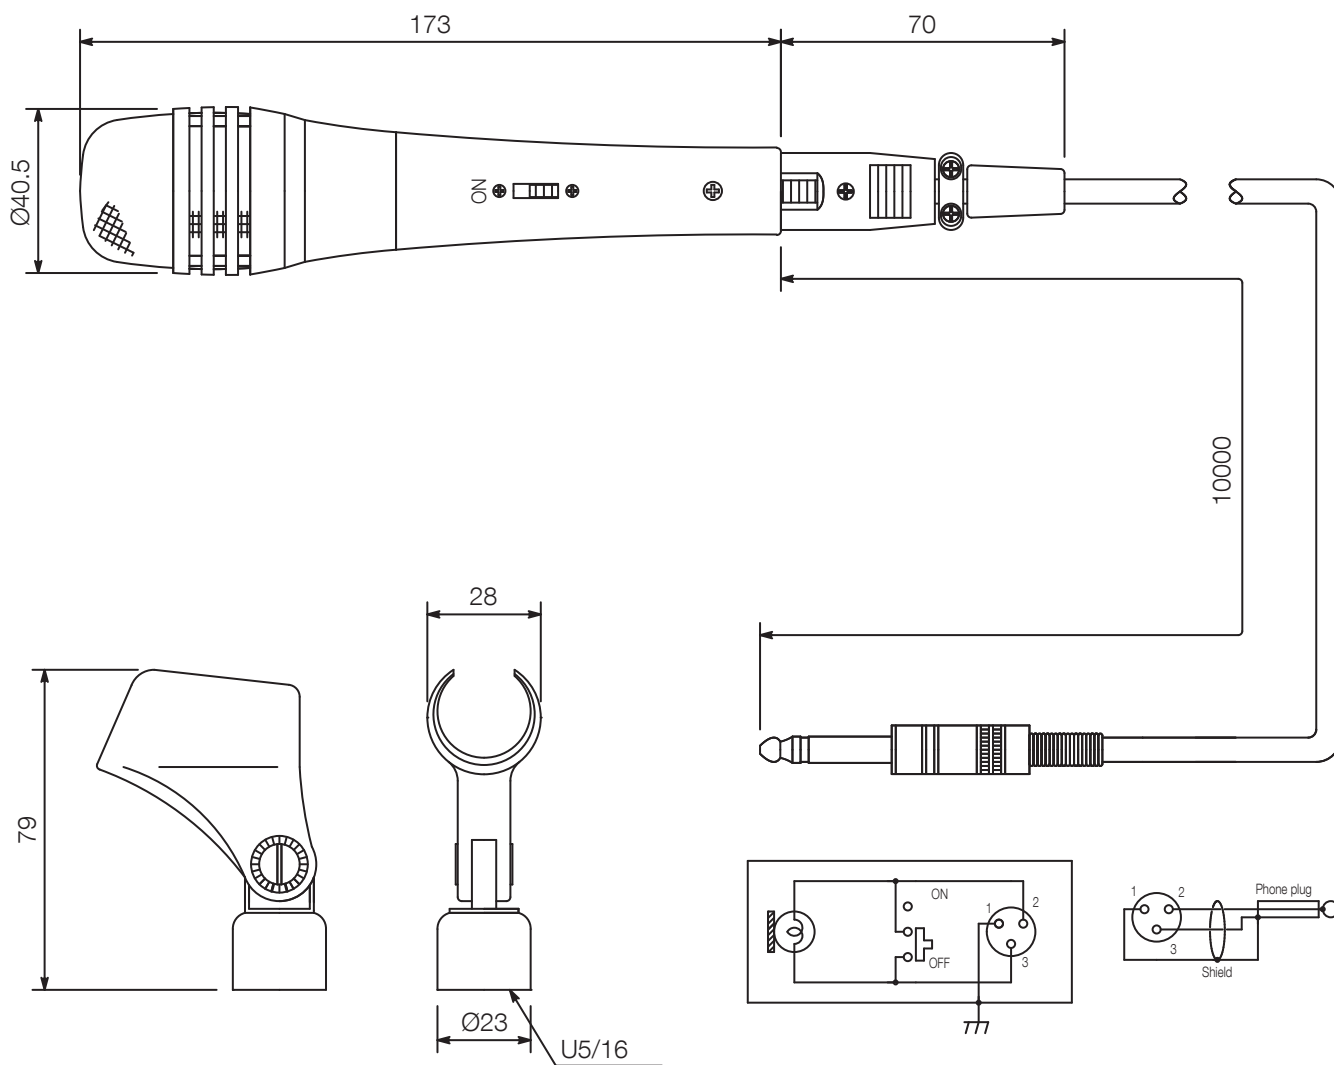

UNIT:mm

SCALE:1/2

Circuit Diagram