


# F-1000WT

## SPEAKER SYSTEM

The F-1000 Series Speaker are compact two-way speaker systems designed for high efficiency, wide range, and high power input handling capability. These speaker systems can be installed in a manner ideal for the location and intended application.

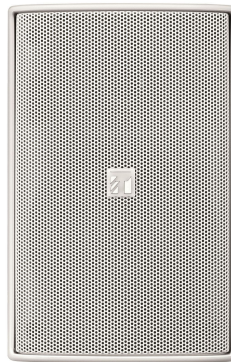

Order no: F-1000WT

### Specifications

Frequency response	85 Hz - 20 kHz
Connection	Clamp terminal
Sensitivity (1#V, 1#m) (combined)	87 dB
Speaker component	Low: 10 cm cone-type, High: 2.5 cm balanced dome-type
Directivity angle horizontal	90 °
Directivity angle vertical	90 °
Rated input	15 W
Tappings	15 / 5 / 3 / 1 W (100 V), 15 / 7.5 / 2.5 / 1.5 / 0.5 W (70 V)
Rated impedance	8 Ω, 70 V, 100 V
Crossover frequency	5 kHz
Power handling capacity	30 W (continuous pink noise), 90 W (continuous program) in 8Ω mode
Dimensions (W x H x D)	130 x 202 x 131 mm
Dimensions (ø x D)	x 131 mm
Finish	HIPS resin, off-white (RAL 9010 or equivalent)

# F-1000WT

SPEAKER SYSTEM

Appearance

