


## DESCRIPTION

The TS-D1000-M2 Microphone is a dedicated component of the Digital conference system's Chairman unit and Delegate unit.  
Its mic head is equipped with an illuminated display ring that allows the status of the units in use to be monitored at a glance.

## SPECIFICATIONS

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| Type                  | Electret condenser microphone                                |
| Directivity           | Unidirectional                                               |
| Rated Impedance       | 1.4 kΩ                                                       |
| Rated Sensitivity     | -37 dB (1 kHz 0 dB = 1 V/Pa)                                 |
| LED Indicator         | Speech indicator (ring type) Red                             |
| Frequency Response    | 100 Hz - 13 kHz                                              |
| Output Connector      | Combined type of XLR-3-12C                                   |
| Operating Temperature | 0 °C to +40 °C (32 °F to 104 °F)                             |
| Operating Humidity    | 90 %RH or less (no condensation)                             |
| Finish                | Gooseneck: Stainless steel, black<br>Other: ABS resin, black |
| Length                | 668 mm (2.19 ft)                                             |
| Weight                | 125 g (0.28 lb)                                              |
| Applicable Unit       | Chairman unit: TS-D1000-CU<br>Delegate unit: TS-D1000-DU     |

## APPEARANCE

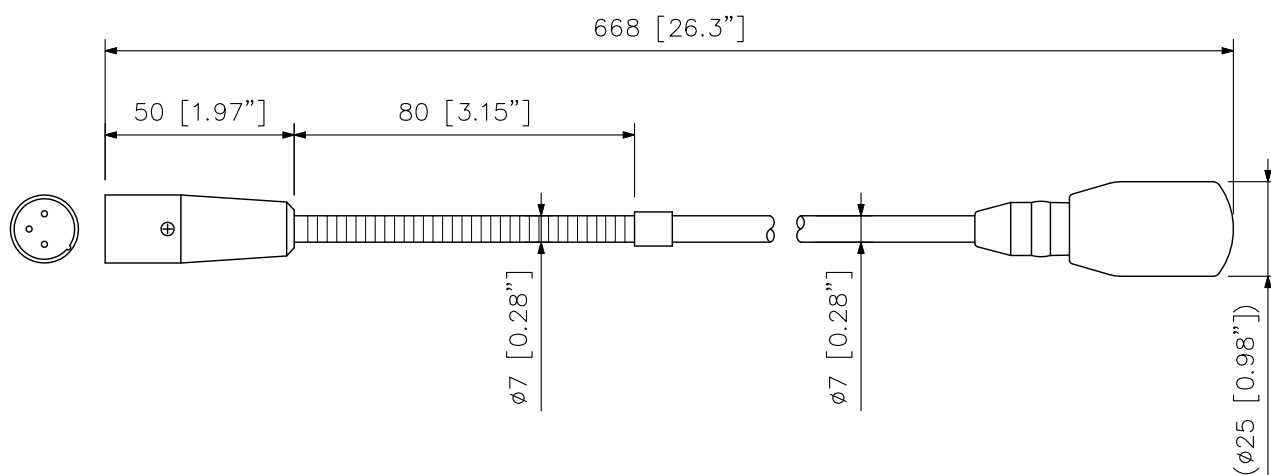

UNIT:mm SCALE:1/2

Note: Numerical values in parentheses are for reference only.