

VM-3360VA

VOICE ALARM SYSTEM AMPLIFIER 360W



Order no: VM-3360VA CE

Specifications

Power source	230 V AC, 50 / 60 Hz
Rated output	360 W (total into 6 zones)
Frequency response	50 Hz - 20 kHz (at 1/3 rated output)
Distortion	< 0.7 %
Distortion	< 0.7 % (at 1 kHz, rated power)
Power consumption	850 W (at rated output), 380 W (EN 60065)
S/N ratio	85 dB (or more)
Inputs	Input 1 - 3: -50 dBV (MIC) / -10 dB (LINE) (changeable), 600 Ω, electronically balanced, combined XLR connector (female) / phone jack Input 4: -50 dBV (MIC) / -10 dBV (LINE) (changeable), 600 Ω, electronically balanced, on removable terminal block (14 x 2 pins) BGM 1 - 2: -10 dBV, 10 kΩ unbalanced, RCA pin jack (2 x 2) External amplifier Input: 100 V Line, removable terminal block (14 pins)
Outputs	Speaker output 1 - 6: Total within rated output, removable terminal block (14 pins) Direct output from internal or external amplifier, removable terminal block (16 pins) Recording output BGM / Paging 0 dBV, 10 kΩ, unbalanced, RCA pin jack
Control input	Control input 1 - 8: No-Voltage make contact input, open voltage: 24 V DC, short-circuit current: under 2 mA, removable terminal block (14 x 2 pins)
Control output	Control output 1 - 8: Isolated open collector output, withstand voltage: 30 V DC, operating current: under 10 mA, removable terminal block (14 x 2 pins)
Indicator	Power, 5-segment bargraph level meter, selected zone, emergency zone active, evacuation active, alert active, front panel microphone active, general fault, CPU fault, menu driven LCD for date, IP address, password etc.
Dimensions (W x H x D)	482 x 132,6 x 431,2 mm
Dimensions (ø x D)	x 431,2 mm
Finish	Aluminium, Steel plate, hairline, surface-treated, black
Operating humidity	5% to 95% RH (no condensation)
Operating temperature	-5 °C to +45 °C

VM-3360VA

VOICE ALARM SYSTEM AMPLIFIER 360W



Appearance

Rear View



439 [17.28"]

AC plug

CE version

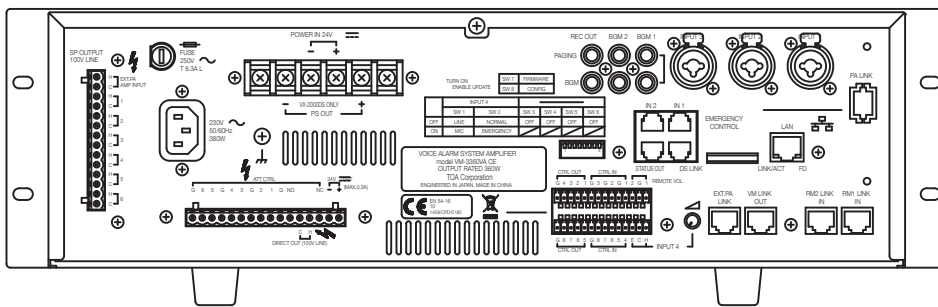

CE-GB version

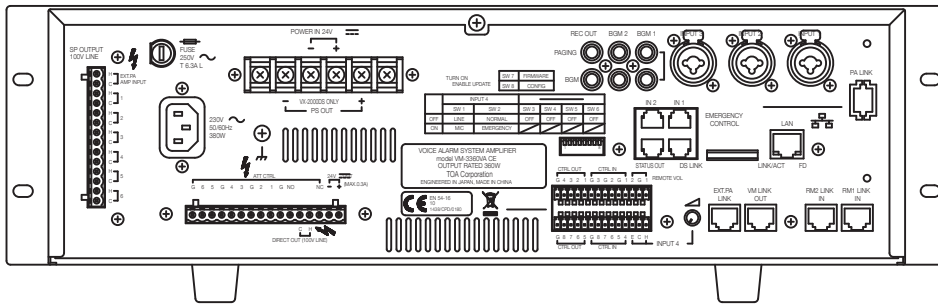

SA version

