

Lightweight body1 AA battery provides up to 8 h of continuous useSelectable microphone sensitivitySelectable transmission output (1 mW/10 mW)3-step battery life indicatorBuilt-in antenna




Order no: WM-D5200 -C7
Alternative products: WM-5225 B01,
WM-5225 C01, WM-5225 C07, WM-5225
D01, WM-5225 G01, WM-5225 H01

Specifications

Power source	Battery (1 AA size alkaline battery, 1.5 V or WB-2000-2)
Battery life	8 h
Type	Electret condenser
Directivity	Unidirectional
Frequency range	823-832 MHz
Selectable frequencies	70
Simultaneous channels	24
AF response	100 Hz - 12 kHz
RF output power	10 mW
Maximum SPL	132 dB
Weight	220,0 g (with battery)
Dimensions (W x H x D)	x 239,5
Dimensions (ø x D)	47 x 239,5 mm
Finish	ABS resin, black
Operating humidity	30% - 85%
Operating temperature	-10°C ... +50°C

Appearance

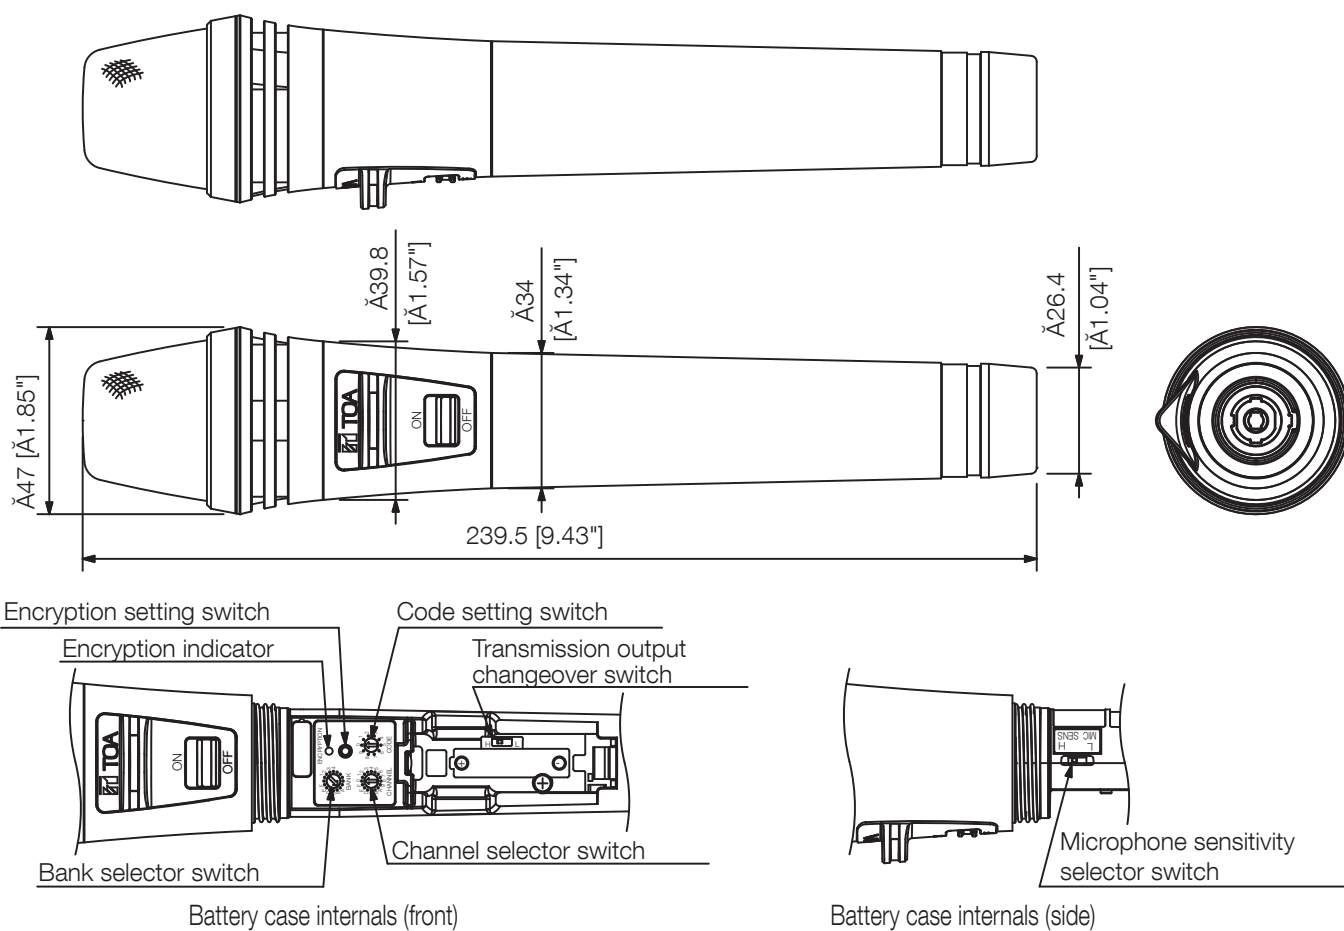

UNIT:mm

SCALE:1/2