



## WM-5225 C07

WIRELESS MICROPHONE

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.

---



Order no: WM-5225 C07  
Alternative products: WM-5265 B01,  
WM-5265 C01, WM-5265 C07, WM-5265  
D01, WM-5265 D04, WM-5265 G01,  
WM-5265 H01, WM-5270 B01, WM-5270  
C07, WM-5270 D01, WM-5270 D04,  
WM-5270 G01, WM-5270 H01, S4.04-HDX-  
EB, S4.10-HDX-EB, S5.3-HCX-C7, S5.3-HDX-  
C7

---




# WM-5225 C07

WIRELESS MICROPHONE

## Specifications

Power source	Battery (1 AA size alkaline battery, 1.5 V or WB-2000-2)
Battery life	10 h
Type	Electret condenser
Directivity	Cardioid
Frequency range	794 – 830 MHz
Selectable frequencies	64
Simultaneous channels	16
AF response	100 Hz - 15 kHz
RF output power	10 mW
Maximum SPL	126 dB
Weight	180,0 g (with battery)
Dimensions (W x H x D)	x 231,5
Dimensions (ø x D)	43,6 x 231,5 mm
Gross weight	0,35 kg
Finish	Resin, black
Operating humidity	30% - 85%
Operating temperature	-10°C ... +50°C

Appearance

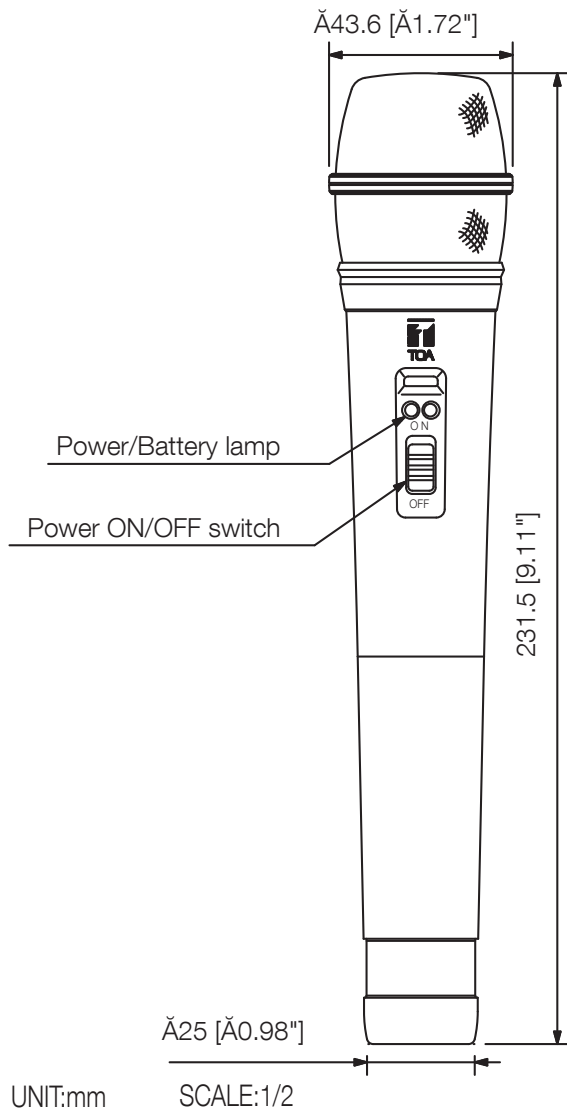

\*

Type	Frequency Range
A01	692 - 722 MHz, UHF
B01, B02	722 - 752 MHz, UHF
C01 - C07	794 - 830 MHz, UHF
D01 - D05	830 - 865 MHz, UHF
E01	668 - 698 MHz, UHF
F01	636 - 666 MHz, UHF
G01, G02	606 - 636 MHz, UHF
H01	576 - 606 MHz, UHF
K01	925 - 937.5 MHz, UHF

